


COVERING YOU WITH DIRT FOR 10 YEARS!

www.mompub.com

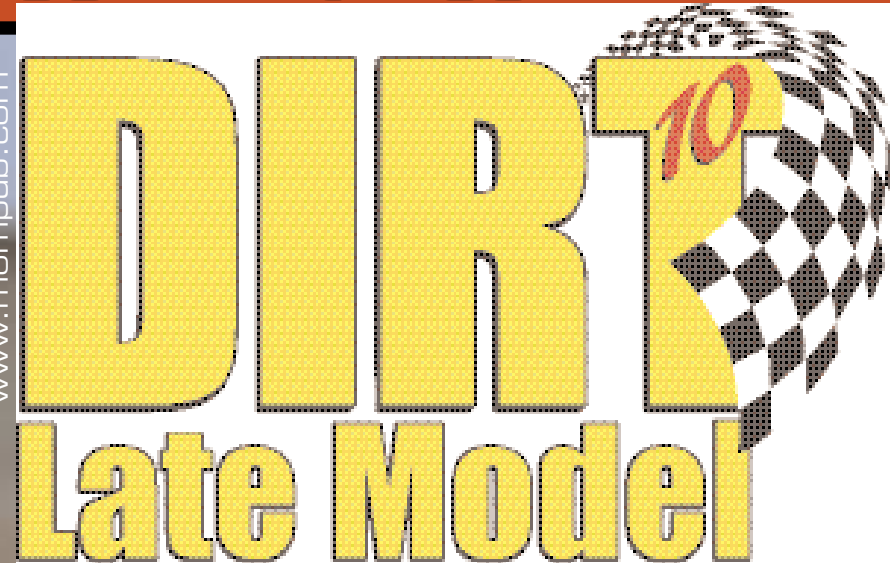

Chris Wall
Jeff Cooke
Arizona Early Thaw

Traction Control!

What's the big deal with this little thing?



Mike Wiarda
Lance Elson
Racers' Wives

MARCH 2005 • \$5⁰⁰

What's the Big Deal with These Little Things?

by Dean Nardi

The following is a test of a popular traction control device. A few months ago, *Dirt Late Model* conducted tests at two East Tennessee dirt tracks (Atomic and Cleveland Speedways) of a controversial black market part, namely the Traction Master 5000-SL traction control system. The item is produced by Davis Technologies in North Carolina and is the most popular on the market today. The company is not hard to find if you are so inclined.

The 5000-SL is not the only unit Davis Technologies manufactures, nor is it the only device available. *Dirt Late Model* invited other manufacturers of traction control devices to participate in the test, but they were not able to arrange their schedules in time. Since we found by speaking with a cross-section of dirt racers that the Davis unit is by far the one in most widespread use, we decided to focus our testing efforts on it, as in: Does it work effectively or not? Or to put it another way: Is it worth the \$6,500 investment?

Traction Control... Miracle Cure or Snake Oil?

Around the Dirt Late Model world, we usually have one traction control argument per week, sometimes around lunch. Helps with the digestion.

"Doesn't work worth a damn," someone will say.

What?

"It's just some slick salesman taking the suckers money."

Huh?

"Let's face it. The best drivers don't need it to win. The other guys are just kidding themselves if they think traction control will win races for them."

I've heard the argument a thousand times already. And then there's the one about the ethical nature of running a piece of equipment that is illegal (immoral and fattening). I wondered why who knows how many dirt racers have ponied this kind of cash for

something that's little more than a feel-good purchase with no actual benefit.

So I argued, "What do you mean it doesn't work? Doesn't it seem that after a few drivers bought the unit the word would have gotten around if it didn't do what it was intended to do? It's common sense."

"That's just it," was the reply. "No one talked about it. They didn't want to admit to actually having used one. So the word did not spread except in the sense that racers became more curious about it. Believe me, I've talked to several drivers who say it's not worth \$65 never mind \$6,500."

I wondered if these drivers weren't just coming up with a story to discourage others from tapping into their little advantage. You've got to admit. That's as good a possibility as the other theory.

"Besides, it just ain't right, using one of those devices. It goes against

everything we stand for in racing: fair play, a level playing field, and letting the driver's talent settle the outcome."

"Oh, really," I replied. "Then why are those making the rules allowing \$3,500 exhaust headers and \$10,000 shock-and-spring packages? And isn't the racer's motto something like: 'It's not cheating if you don't get caught?'"

But there was one way to settle the argument as to whether this product worked or not, and that was to give it a track test. The conditions of the test would be set up and monitored by representatives of this magazine. We did not hire J.D. Powers & Associates to verify the results but will attest as to their accuracy.

"You'll see," said some folks. "It won't make a difference."

"I don't know," said some others. "There's got to be a reason drivers buy it."

We didn't know. And that's why we conducted this test. Before we proceed with the results, this magazine would like to thank Dale McDowell and Ray Cook of the McDowell-Cook Driving School and the Atomic Speedway along with Marshall Green, Monte Morrow and the Cleveland Speedway Driving School for their assistance during our experiment. Also, thanks to the drivers who volunteered for testing duty. Trust me, we didn't have to twist anyone's arm.



Davis Technology's most popular traction control unit, the 5000-SL, is about the same size as the average stopwatch. At that size, it's pretty easy to conceal.


Fuel Pump Seals

Originally designed in conjunction with Robert Yates Racing for use with the Yates Belt Drive System, the Seals-it Fuel Pump Seal is designed to keep hot engine oil in the engine and out of the fuel pump. Centrifugal force throws the hot oil into the fuel pump housing causing oil leaks and the transfer of more heat to the fuel. Our new seal kit uses a molded neoprene seal bonded to an alloy plate to seal around the pump arm and keep the hot oil out of the pump cavity. A special insulating gasket and sleeved, insulated bolts also cut down on the engine heat transferred to the pump to further reduce fuel temperature.

Seals-it manufactures fuel pump seals for all styles of fuel pumps.

Know the style you need when ordering.


Chevrolet fuel pump seal	#CHFP 4002
Ford fuel pump seal	#FFPG 4001
Mopar fuel pump seal	#MOPF 4003

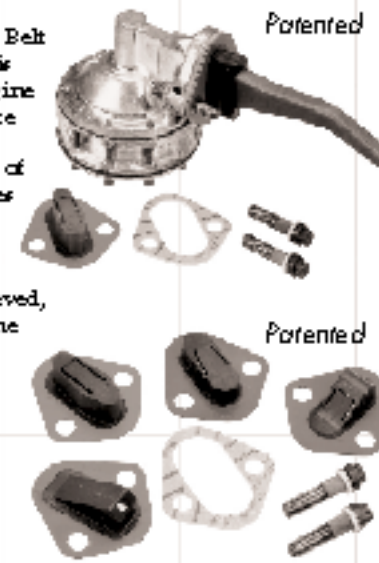

Seals-it

164 Maple Street • Ellington, CT 06029
860.979.0060 • fax 860.979.0046 • www.sealsit.com

pro-life SERIES IV WIDE-5 HUBS, ROTORS AND SPINDLES

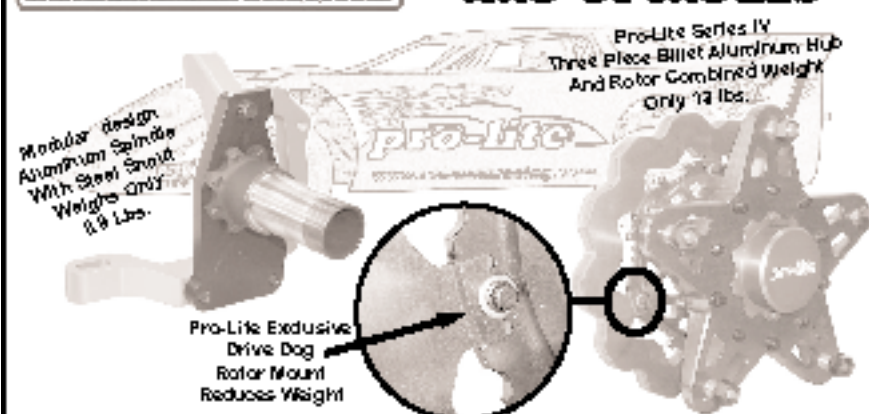

These new series IV wide-5 hubs from pro-life feature a three piece billet aluminum design that is the lightest on the market. These hub assemblies reduce unsprung and rotating weight. They feature a unique drive dog rotor mounting system that eliminates up to 2 lbs. per rotor. The hub and rotor assembly is 4.1 lbs. lighter per corner than the competitors hub and rotor assembly. The bolt together billet aluminum spindle assembly with a heat treated steel snout is 3.1 lbs. lighter than a standard steel spindle. The spindles feature an adjustable caliper bracket that will accommodate different diameter brake rotors.

Cofeman Racing Products • N-1597 US41 • Menominee, MI 49858
Phone Toll Free (800) 221-1851 • Fax (906) 863-2665
Email: cofeman@cybrzn.com • Web Site: www.cofemanracing.com

Is Traction Control Outrunning You?

Crew chief Ronnie Stuckey is a freelancer, which means he works with a lot of different race teams on many levels, from local weekend warriors to full-time professionals.

In that capacity, he's had plenty of experience with traction control units, both in reality and in theory. We talked to Stuckey to get his take on the place of traction control in Late Model racing.

"Everybody's shop that you go into, one of their main topics they want to discuss is traction control," Stuckey said. "It seems that every racer is convinced that the guy that's outrunning him is using traction control. But then, you can go to the other guy's shop and find out that he thinks he's being outrun by traction control too.

"And sometimes, neither one of them is using it."

So is the effectiveness of traction control as much psychological as it is real? Is the perception reality?

"Everybody who thinks they're being outrun by traction control, feels like they have to have it on their car," Stuckey explained. "If you don't run well with it, you can turn around and sell it. But, mentally, you've got to know whether that's what you're being beat by.

"A lot of the good drivers have bought it, and a lot of them have sold it when they've seen that they don't need it. But until you have it and put it on your car, you're going to always feel like you're getting outrun by it.

Traction control has been a hot topic the past few seasons, and at times it seems everybody is using it or, at the least, worrying about it. Still, Stuckey says that "there are a lot of teams that haven't tried [traction control] and don't want to try it, because they think they can race without it."

How widespread is the use of traction control? "As for the number of Late Model guys out there who have it, I'd say it probably approaches half the field," he said. "I'd say that on the series that have spec tires and eight-inch spoilers, it's probably two-thirds of the field.

by Tim Lee

So what are the advantages of traction control? "In certain conditions, there's no advantage in having one," Stuckey said. "If you're going to race every week on a track that stays a little hooked up, wet, muddy, with traction, a little rough, it's probably not an advantage to have one.

"But if you're going to run on a track that gets any kind of dry-slick, black, with spec tires, then there's no doubt that it has its advantages. And the biggest advantage has got to be tire wear. No wheel-spin equals no heat in the tire. And no heat in the tire helps get you through the last ten or twenty laps of the feature when everybody else's tires are giving up."

According to Stuckey, traction control units are not the "magic ticket" to victory lane that legend has built them up to be. "What we've seen is that, if you've got a guy who's two seconds off the pace, you can put one of these in his car and it might bring him within a second, but it's not going to make him go to the front," he said. "It's not going to be the magic ticket to make him go from eighth to first."

But, he added, "If you're running third, and you leave your car a little too free, you might can run third with it. Without it, you might start third and you're a little too free, you might finish fifth.

"Now, whether the two guys who passed you have it, I don't know. But it's always in the back of your mind that they had it. So you're going to be willing to go out and buy one so you can finish third. And sometimes, if you can finish third a few times instead of falling back to fifth, that money might come back to you pretty quickly."

As for policing traction control, Stuckey feels that the more sanctioning bodies have tried to crack down on its use, the smaller (and thus more expensive) the units have become. "The more they've tried to police it, the smaller the units have gotten and



the more expensive they've gotten," he said of the units that generally cost anywhere from \$4,000 to \$8,000 for something that will fit in the palm of your hand. "I'm not sure that if, a few years ago when they first came out, that if everybody had just gotten one, the price would have stayed low."

Regardless of the seemingly high price, Stuckey says that, when put into perspective, it really might not be as bad as it's made out to be. "The little bit of money you spend on that isn't that much," he explained. "Our tire bills are bigger than that. Our wheel bills are bigger than that. We spend more on transmissions. Our motor prices are way up there.

"The units that fit in an ignition box cost around \$4,000. And four grand isn't a bad price to help us go fast. We spend \$3,000 on a set of shocks to help us go fast, so \$4,000 for a little electronic ignition doesn't seem bad either."

The equipment for the tests was supplied by Shannon Davis, who was on hand at both locations to connect the traction control unit as well as adjust it to suit the individual cars and drivers that participated. Noted crew chief and car builder Ronnie Stuckey attended for technical support and to help interpret the results for this magazine. Ray Cook and several other drivers ran stop watches. The times were verified by a second stopwatch operated by me.

The traction control unit that Davis manufactures is not difficult to install, especially when concealment is not an issue. It does have to be adjusted, however, to suit changing track conditions as well as varying capabilities of drivers and cars. Davis provides direct phone support for his customers, some of whom reportedly rely on the expertise of other racers that they purchased their unit through. It's no secret that many of these units have been sold by well-known racing people, either directly or through referrals.

Anyway, we had people at the tracks that knew what they were doing with this product and could dial it in to their satisfaction. Whether or not it worked was what we intended to find out.

The unit could be turned off or on according to our test objectives without

the knowledge of the drivers. In that way, they could just go out and drive the car and not try to turn laps as if they were expecting traction control to be in effect. At Atomic, we used drivers of different skill levels. There was Dale McDowell, an elite national racer, Mark Vineyard, a solid regional driver, and Brent Robinson, an inexperienced driver from Virginia.

With McDowell, you will be reading the results of a seven-lap run. The times improve as the tires build heat in each case (on or off).

Unit on	Unit off
14:17 seconds	14:42 seconds
14:20	13:98
14:02	14:26
14:30	14:50
13:90	13:89
13:91	14:02
13:64	14:03
average (on)	(off)
14:02 seconds	14:16 seconds
difference high/low (on) (off)	
:66	:61

Next we tested Mark Vineyard,

continued on page 118



For our test, the traction control unit was installed behind the dash of the car, near the MSD box. With the smaller units, possible mounting points are limitless.



Manufacturer of Race Car Chassis & Suspension Components


ALL BILLET DESIGN BEARING BIRD CAGES

TWM Bird Cages are simply the best available today. Billet liners, Billet bearing, or Welded are available with the most complete option list known to date. Universal models and specific dimension models are available to fit most chassis.



J-Bar Cam Adjustable Sliders & Pinion Brackets

- * Most user friendly adjustable mounts available
- * Back off the lock screw, loosen the mounting bolt enough to turn the cam adjuster with your wrench, align one of the lock screw holes with a reference dot and retighten.



* Quick Change Aluminum 45 Seal Part # 311-182


- * 2" Square tubing J-Bar Mounts
- * Single Side + 3" double dot (Nu. #075-1131-1)
- * Double Side (Nu. #075-1132-1)
- * Seal Available Soon

- * Still Available - Welded Steel & Aluminum
- * Other Products - Too many to list, please call!
- Call or Email - INFO@TWMRACING.COM
- FOR NEW 2004 TWM 20 PAGE CATALOG

TWM Racing Products Inc.

420 Tioga High Road
Bart, Louisiana 74105
Phone: 318.640.4112
Fax: 318.641.6135
www.twmracing.com

by Dean Nardi

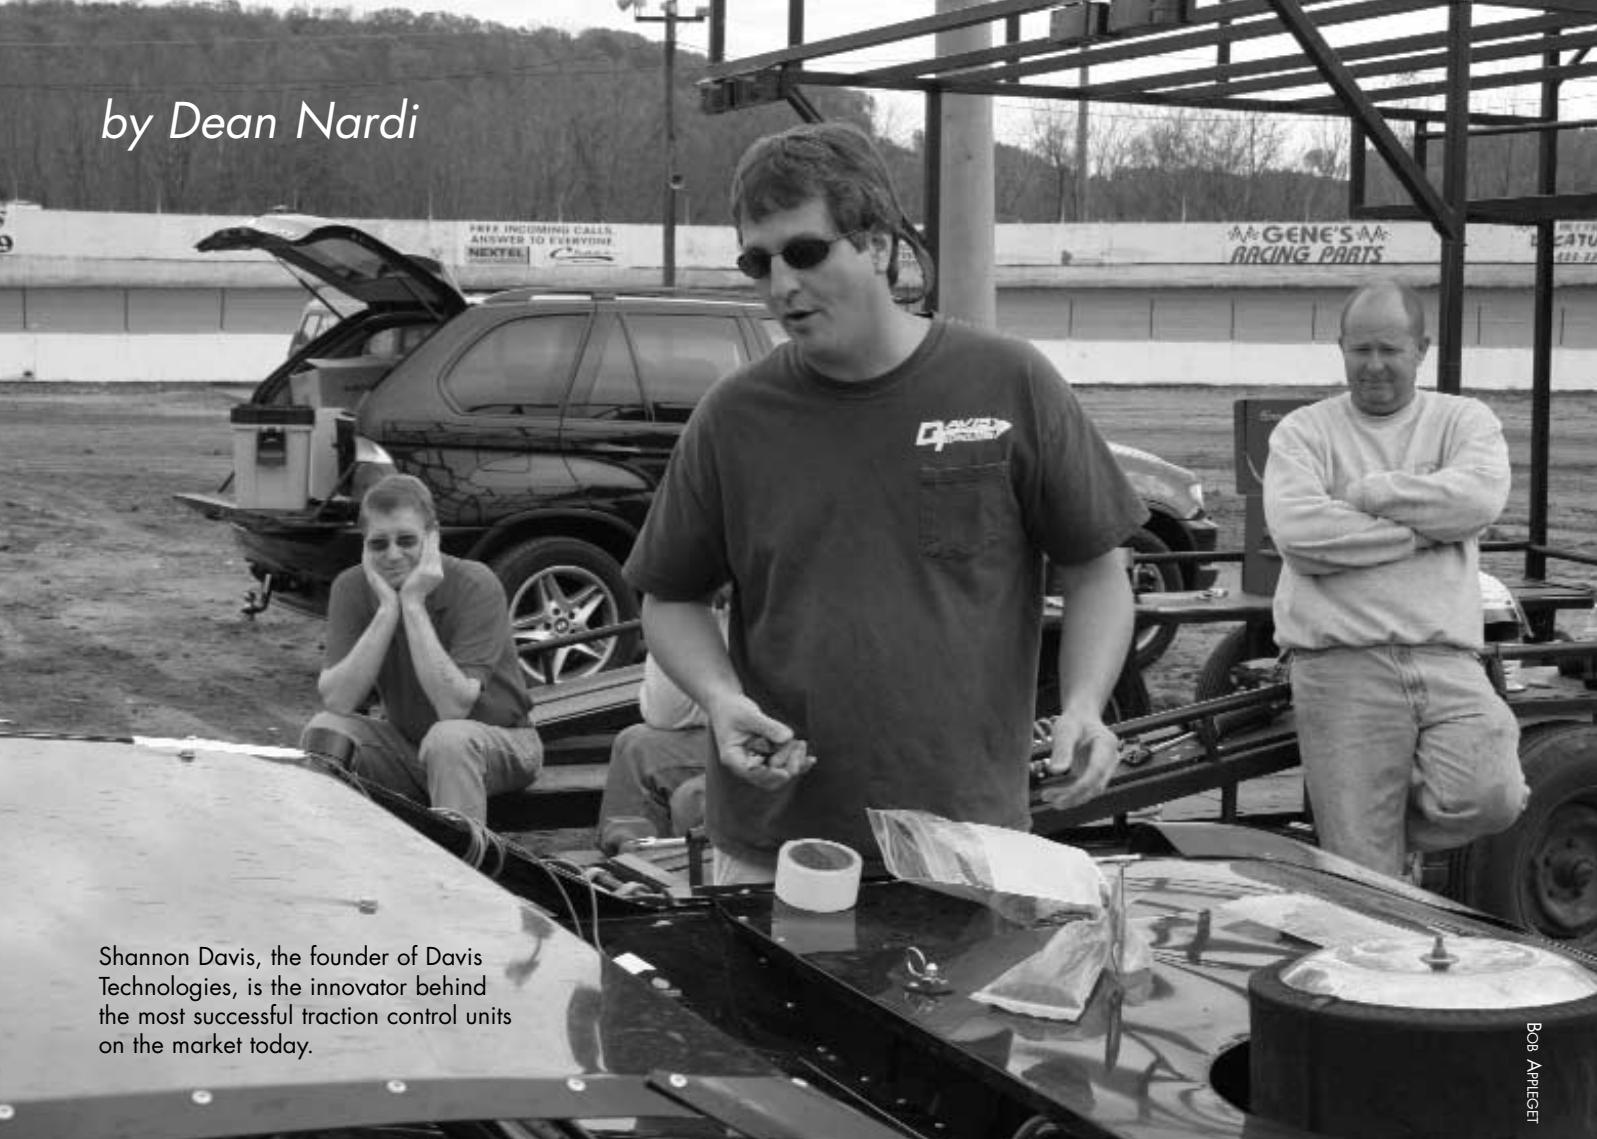

Shannon Davis, the founder of Davis Technologies, is the innovator behind the most successful traction control units on the market today.

BOB APPEGET

Traction Master

Warning: The following article contains graphic descriptions of the activities of racing's own Voldemoot aka He Who Must Not Be Named

This is Traction Control

It is a device like no other device - a marvel of technology, the device by which drivers can actually begin to leave the driving to something else, so that they can perhaps one day in the future just ride along and spot the potential for wrecks and monitor the race car's vital signs. It is a device that urban legend says will allow drivers to outdistance any and all competitors by the flick of a switch or a signal from a transmitter. The microchips send signals in nanoseconds between the

synapses, explained in language like dealing with lateral (front-to-back) loss of traction, acceleration slip regulation, and other words from the geek dictionary. Some say it is a wonderful device, an engineering marriage of electronics and mechanics that helps you to put the rubber to the road (or the track).

This is Traction Control

(Reprinted from the Davis Technologies website):

These systems are actually able to detect wheel slip better than most wheel speed sensor-based systems. The reason for that is our systems monitor the rotation of the crankshaft

through the distributor signal. The distributor fires every 90 degrees of crank rotation (V8), and with a 1:1 top gear you can measure the rotation with a quarter of a turn. Now, factor in a 5:1 final drive (rear end) ratio and tire rotation can be measured within 1/20 of a turn (that is about four to five inches on most tires). The fact that the engine is turning much faster than the wheels, amplifies the slip at the crankshaft, making our systems very sensitive.

Round track customers report to us lower lap times and cooler tire temps. Just by turning on the system lap times can

drop by 1-3 tenths. Consider this if you used it for an entire race and conserved your tires from lap one. By the end of a 100-lap race, lap times can be as much as 5-15 tenths faster per lap than without the system.

This is Traction Control

(Reprinted from the Davis Technologies website): The TM-5000-SL is the most popular Traction Control system on the market today. It is so advanced that it is virtually impossible to detect. In fact, we have never had a customer caught with any of our systems. The unit is 1/3rd the size of a pack of cigarettes and is driver removable after you win the race

This is Traction Control

He was trying to make a living working on a professional road racing team when the idea came to him. His devices can now be found in virtually every type of motor racing. They may be classified as Black Arts material, or considered as contraband, but those are deeper questions for other people to ponder.

This is Shannon Davis.

He remembers a time when he worked on IMSA GTP and other high tech road racing race cars. He remembers not having anything like this on their cars, although he felt other teams that had major factory backing had elaborate sensor-type systems. An idea began to materialize.

"We went to Trans-Am racing, where you'll get factory efforts but a little more low level. Instead of twenty million a year, they only spend two million," he jokes, but not really. "We knew we were racing against something, so went hunting around and found sensor systems and brake pressure systems and throttle actuators, which seemed awfully dangerous to me. None of this stuff was hideable, however, and we underwent pretty strict tech inspections."

A better mousetrap is what Davis came up with, although he hardly could imagine how that mousetrap



EARL PEARSON JR., LARRY WATSON AND COMP CAMS® WON THE 2004 XTREME MOTORCAR CHAMPIONSHIP!

COMP CAMS® CAMSHAFTS

COMP Cam s® offers the same race winning camshaft designs and engineering support, that powers Earl Pearson Jr., for your race team regardless of the series or class. COMP Cam s® camshafts use advanced lobe designs to take full advantage of the latest developments in pushrod, valve spring and lifter technology. Whether it's an Xtreme Oval Track cam or a specially engineered custom grind that best fits your application, one thing is for certain, COMP Cam s® is the only choice if you're serious about winning.



Custom Grinds With Quick Turnaround Available

- Available In Flat Tappet and Roller Applications For All Classes, Track Sizes and Rules Packages -

COMP CAMS® VALVE SPRINGS



Think all valve springs are the same, think again. Although most valve springs look pretty similar, it's what you can't see with the eye that makes the difference. How do we know this? Because at COMP Cam s® we've been perfecting the art of making valve springs for over 25 years.

Each COMP Cam s® spring is manufactured using the latest in CNC coiling centers for exacting tolerances and consistency, but it really starts well before the design process. Our engineering team regularly travels to steel plants throughout the world to ensure that our springs use only best material available. Without the right material (COMP Cam s® Super Clean™ material) even the best spring design is headed for failure. Once we're satisfied that we have the right material, then it's good old fashioned hard work and ingenuity that separates COMP Cam s® valve springs from the competition. Only after hundreds of hours on the valve motion analyzer and even more hours of track & dyno time do COMP Cam s® valve springs reach your engine. The superstars of racing trust COMP Cam s® for power and durability, you can too.

- Call for your application -

Engineered to Finish First.



Get The Full Catalog And A Racing T-Shirt For Only \$15

CAM HELP® 1.800.998.0853

PHONE 901.795.2400
compcams.com

who has a lot of laps under his belt at Atomic. The first run came with the TM-5000SL in Mode 3, an aggressive setting that caused a slight throttle stumble. Note — the track was getting faster as evening approached.

Unit on	Unit off
13:76 seconds	13:68 seconds
13:96	13:46
13:97	13:73
13:69	13:51
13:70	13:57
average (on)	(off)
13:82 seconds	13:59 seconds
difference high/low (on)	(off)
:28	:27

Vineyard's next run came with unit in Mode 2, a setting that eliminated the stumbling in the motor.

Unit on	Unit off
13:18 seconds	13:80 seconds
13:39	13:71
13:36	13:50
13:30	13:80
13:38	13:75
13:26	13:70
13:33	13:69
average (on)	(off)
13:31 seconds	13:71 seconds
difference high/low (on)	(off)
:21	:30

Brent Robinson was attending the McDowell-Cook School. He is a beginning racer who brought his own car from Virginia and had been loose throughout the day during school sessions. He would be the perfect test subject. After a couple trial and adjustment runs, we sent him out at Mode 2 with 3 o'clock timing.

Unit on	Unit off
13:51 seconds	14:06 seconds
13:63	13:83
13:57	13:65
13:37	13:75
13:61	13:65
13:36	
average (on)	(off)
13:51 seconds	13:79 seconds
difference high/low (on)	(off)
:27	:41



Bob Arringer



Bob Arringer



Bob Arringer

This series of shots are from the Cleveland Speedway test. In the first photo, the traction control unit is turned off and you can see the tire spinning badly as the car accelerates off the corner. In the other two shots, the unit is on (different lap) and in the second shot you can see the tire start to spin, kicking up a little dust. Then the unit kicked in (notice it only slipped for about five inches of tire rotation) and the tire stops spinning and the side wall begins to wrinkle as the tire gets traction.

It is quite evident that the use of traction control made a difference for each of our drivers, both in terms of speed and, more importantly, consistency. This was most apparent in the runs by Robinson, the least skilled and experience of the drivers. From Ronnie Stuckey's notes on the test: "With the unit off you can see noticeable wheel-spin. The car breaks loose exiting turn four. With the unit on, the car looks way more consistent, coming straight off the corners."

For the second part of our test, we moved away from the high banks of Atomic to the somewhat flatter surface of Cleveland Speedway, giving us a completely different track configuration to work with. The drivers who tried the unit here were Marshall Green, an experienced national level racer, solid regional and local racers Todd Morrow and Riley Hickman, and several school participants (your basic beginners): Larry Hagencamp, Brian Barnett, and Reggie Jackson (not the ex-baseball player).

With Green, it is interesting to follow the progression of adjustments. Marshall has made a gazillion laps around Cleveland as school instructor. You'd expect his car to pretty much know the way around the track by itself.

Unit on (Mode 2, 23 degrees)
14:56 seconds
14:63
14:55
14:12
14:86
average 14:54 seconds
difference hi/low :74

Unit on (Mode 1, 18 degrees)
14:53 seconds
14:38
14:41
14:53
14:51
average 14:47 seconds
difference hi/low :13

Unit on (Mode 1, 16 degrees)
14:43 seconds
14:25
14:18
14:31
14:31
14:40
14:42
14:42

Forget the rest, choose the BEST! **Free Shipping!**
on orders over \$100.
Some restrictions apply.
(Not for resale)

If you don't see it, doesn't mean we don't have it.

<p>BEHRENT'S</p> <p>In-Stock Best Transmission and Parts!</p> <p>4000 Lb. Aluminum Jack #000F4000...\$149.95</p> <p>Jr. Trailer Door Cabinet 78" x 12" x 12" w/ 4" x 12" x 8" #1122...\$84.99</p> <p>Gaster Camber Gauge Gauge & Mode 3 adaptor (# 7498-78) #0000-3333...\$119.50</p> <p>Tire Pressure Gauges D-150, D-200, D-400 Regular...\$29.95 Glow in the Dark...\$32.50</p> <p>SWELD HS or Lightweight XL Wheels 16" or 18" w/ 2000 lbs. capacity</p>	<p>NEW! KIRKEY Full Containment Lightweight Seat #180-4000...\$769.99</p> <p>Lightweight Upholst Seat #180-0000...\$299.99</p> <p>MSD Low Prices!</p> <p>Your source for MSD!</p> <p>Hot Lap • Aluminum intake table • 1000 RPM sensor, fuel injector, glow plug • 1/2" to 2" air/metric hose #00070007...\$135.00</p> <p>RED LINE</p> <p>Oil and Gear Lube We have a full line of oil and grease including synthetic gear lube.</p> <p>NEW! Pro Max Fuel Cell 52 Gallon...\$382.13</p> <p>Aluminum Radiator 27" x 18" 16" core #10001000...\$179.94</p>	<p>NEW! Crew Gloves Your choice of yellow, red, blue, black, or purple. MEANS perfect fit...\$18.94</p> <p>ZNEK Cordless Impacts It has 2 bit holders, charger & case. 36V, 1/4" hex, 168 ft-lb torque...\$169.99 7.5V, 3/8" hex, 258 ft-lb torque...\$209.94</p> <p>BEAR'S Plumbing We carry the full line of Bear's products.</p> <p>Timing Light FLS-1001...\$42.77</p> <p>Aluminum Air Tank Lightweight with straps, for air over shock. 60.0004...\$69.95</p> <p>Scale System Includes 75" x 75" scale pads. #00100-1010...\$999.00</p>
<p>SIMPSON</p> <p>NEW!</p> <p>Valor 500177</p> <p>Poyager 500170</p> <p>Randy 500220</p> <p>Shogro Shade 500173</p> <p>SV Poyager 500172</p>	<p>SIMPSON Safety Apparel Belts • Shoes • Gloves • Suits Call for low prices!</p>	
<p>Behrent's is your Safety Connection for the best prices!</p>		
<p>IMPACT</p> <p>NEW!</p> <p>Draft 180102</p> <p>Charger 180120</p> <p>Charger 180140</p> <p>Charger 180150</p> <p>Alt Draft 180100</p>	<p>IMPACT Safety Apparel Belts • Gloves • Shoes • Suits Call for low prices!</p>	
<p>Call Toll FREE 877-3 RACE IT (877-372-2348)</p> <p style="font-size: 2em; font-weight: bold; text-decoration: underline;">Behrent's</p> <p style="font-weight: bold;">Performance Warehouse</p> <p style="font-size: 0.8em;"> Mon: 9 AM - 5 PM Tue: 9 AM - 5 PM Wed: 9 AM - 5 PM Thu: 9 AM - 5 PM Fri: 9 AM - 5 PM Sat: 9 AM - 4 PM Sun: 10 AM - 4 PM </p> <p style="font-size: 0.8em;"> 28 Mendota Road Florida, NY 10921 </p> <p style="font-weight: bold;">Shop On-Line 24 hours a day at www.behrents.com</p>		

average 14:34 seconds
difference hi/low :24 (Obviously,
we're getting closer here)

Unit off
14:37 seconds
14:42
14:39
14:37
14:43
14:34
14:37
14:43
14:50
14:50
average 14:41 seconds
difference hi/low :16

Unit on (Mode 1, 14 degrees)
14:28 seconds
14:31
14:30
14:31
14:32
14:32
14:36
14:43
14:43
14:45
average 14:35 seconds
difference hi/low :17

Next we utilized Todd Morrow.
Once again the track is

picking up speed as we get closer to
evening.

Unit on (Mode 2, 15 degrees)
14:09 seconds
14:16
14:19
14:19
14:37
14:39 (car develops a brake problem)
average 14:23 seconds
difference hi/low :30

Unit on (Mode 2, 18 degrees)
13:96 seconds
14:20
14:06
14:37
14:37
14:37
14:34
average 14:24 seconds
difference hi/low :43

Unit off
14:28 seconds
14:09
14:09
14:15
14:25
14:20
14:28
average 14:19 seconds
difference hi/low :19

Unit on (Mode 1, 16 degrees)
14:22 seconds
14:21
14:22
14:15
14:18
14:12
14:28
average 14:20 seconds
difference hi/low :16

Unit on (Mode 1, 15 degrees)
14:06 seconds
14:18
14:09
14:18
14:14
14:20
14:21
average
14:15 seconds
difference hi/low :15

Riley Hickman, another local
driver very familiar with the
Cleveland oval, followed Morrow
to the track.

Unit off
14:28 seconds
14:31
14:32
14:18
14:31
14:50
14:25
average 14:32 seconds
difference hi/low :32

Unit on (Mode 1, 14 degrees)
14:28 seconds
14:21
14:18
14:43
14:45
14:62
14:55 (tires are shot)
average 14:39 seconds
difference hi/low :44

Unit on (Mode 1, 18 degrees)
13:84 seconds (new rear tires)
13:82
13:96
14:09
14:15
13:97
14:05
average 13:98 seconds
difference hi/low :33

We've worked our way down to
the school students. First up is
Hagencamp, a Paducah, Kentucky, res-
ident who has never driven before in
competition.

Unit off
17:64 seconds
16:93
17:34
17:38
16:98
average 17:25 seconds
difference hi/low :71

Unit on (Mode 3, 18 degrees)
16:80 seconds
16:84
16:55
16:41
16:98
average 16:72 seconds
difference hi/low :57

Our next victim is Brian Barrett, an
Ohio resident who raced some about
ten years ago at Skyline Speedway, but
nothing since. But it's just like picking

up the piano again, right?
Unit off
16:15 seconds
16:19
16:09
16:18
16:24
16:56
16:46

average 16:27 seconds
difference hi/low :47

Unit on (Mode 3, 22 degrees)
15:96 seconds

16:15
16:17
16:00
16:00
15:93
16:28
average 16:07 seconds
difference hi/low :35

Our last test subject was Reggie
Jackson. He had a little more experi-
ence behind the wheel than the first
two drivers.
Unit off

Joe Garrison on Traction Control

When asked about traction con-
trol, Joe Garrison of GRT Race Cars
had this to say:

"Traction control has been
around dirt racing for a while. Just in
the last couple of years it has become
a hot topic. Earlier systems had a lot
of equipment you had to hide and
were just not practical to use if it was
against the rules. The technology that
is being used now allows the racer to
hide the entire system in his pocket.
The fact that it is so easy to hide
makes it a lot more popular than it
used to be, and a very controversial
subject. Nowadays every race won is
won with traction control; at least,
that is what the losers say.

"A few years ago, a system was
available that used wheel sensors and
the rear brakes to try and control the
wheel spin. We had some customers
with these systems who complained
they could not get them to work. I
decided to get one and see what we
could find. The first major hurdle is
hiding all of the equipment that was
required. After a few months of fool-
ing with the thing, we never really got
it to work. We had a lot of trouble
keeping the sensors working and the
brakes were hard to keep cool. Even


when we tried all of the manufacturer
recommendations it still didn't work.
I later learned that the "Brain Box"
was an off-the-shelf industrial con-
troller used on conveyor belts, and
was not even designed for racing.

"One day I had a customer come
in with a new unit he had gotten from
Davis Technologies. I thought he was
kidding when he showed it to me. He
pulled it out of his pocket and said
that this was the whole system. He
explained that it worked by monitor-
ing the rate of acceleration of the
engine and retarded the timing if it
was too high. I was skeptical until he
told me that he had already tried it on
the track and was a good two-tenths
faster. This was a guy that was in the
top five in points in the top Late
Model series.

"I called Davis and got one on the
way. I was very impressed with the
size of the unit and how simple it was
to hook up. I let a few guys try it and
most of them liked it. It isn't for every-
one and it will not fix a bad car, but on
a good car it can be worth a few tenths
and very consistent times. I was sur-
prised with how well it worked for so
many different drivers."

— Joe Garrison, GRT Race Cars

Wilwood's Advanced Proportioning Technology

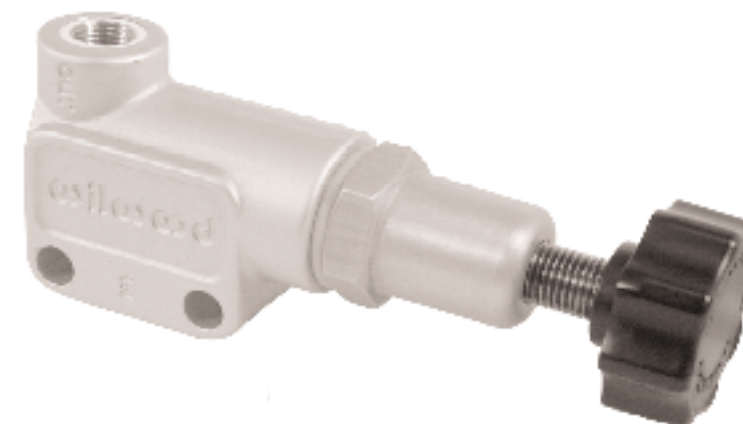

This new generation of adjustable
proportioning valves from Wilwood combines
the latest refinements in manufacturing
processes and materials delivering precise
pressure metering from a compact, lightweight
forged billet design. Available in knob or lever
style for precise proportioning from 100 to
1,000 PSI. At full release, valves are capable
of up to 57% reduction in line pressure. The
new smaller body accommodates easy
mounting in a variety of locations with two .25"
diameter holes on 1.00" centers. Along with
standard 1/8" NPT inlet and outlet ports with
two 1/8" NPT to 3/8-24 I.F. brake line adapters
(included) makes installation simple.

www.wilwood.com

4700 Calle Bolero • Camarillo, CA 93012
Sales: 805 / 388-1188 • Fax: 805 / 388-4938

Contact Wilwood
or Your Nearest
Wilwood Dealer



15:37 seconds
 15:49
 15:40
 15:51
 15:62
 15:65
 15:49
 average 15:50 seconds
 difference hi/low :28

Unit on (Mode 3, 21 degrees)
 15:28
 15:25
 15:37

15:39
 15:62
 15:58
 15:57
 average 15:44
 difference hi/low :37

Finally, I got a chance to go out on the track. It was a tremendous rush. You won't believe the results. And you shouldn't. I was seated to the right of Marshall Green as he tooted around the track on an extended run.

Remember this was the two-seater school car, and it does not exactly have tons of horsepower.

Unit on (Mode 1, 15 degrees)
 15:25 seconds
 15:43
 15:43
 15:28
 15:32
 average 15:34 seconds
 difference hi/low :18

Unit on (Mode 1, 16 degrees)
 15:19 seconds
 15:16
 15:28
 15:16
 15:25
 15:32
 average 15:23 seconds
 difference hi/low :16

Unit on (Mode 1, 19 degrees)
 15:10 seconds
 15:12
 15:15
 15:10
 15:22
 average 15:14 seconds
 difference hi/low :12

Unit on (Mode 2, 19 degrees)
 14:90 seconds
 15:26
 15:10
 15:29
 15:12 (too strong a setting)
 average 15:13 seconds
 difference hi/low :39

Unit off
 15:08 seconds
 15:19
 15:07
 15:21
 15:21
 15:34
 15:24
 15:23
 15:18
 15:29
 average 15:21 seconds
 difference hi/low :22

Unit on (Mode 1, 19 degrees)
 15:12 seconds
 15:12
 15:01
 15:08
 14:91
 15:12

15:12
 15:04
 15:13
 15:08
 average 15:07 seconds
 difference hi/low :22

One common statement I hear over and over when the subject of the efficacy of traction control is brought up goes something like this: Anyone can win a race when it's in the mud, but put the cars on a dry/slick track and the better drivers will always prevail. Another line of thinking is: The best drivers are so talented with their foot and hand-to-eye coordination that traction control is not any help. The only drivers that would benefit are those with lesser skills.

There is likely some truth in both of those premises. But from what we discovered (assuming our interpretation of the results is accurate), traction control can round off the rough edges on any driver, at least any human driver. When the unit was on, not one driver got into any trouble, and that is something you can't put a price on. There is no question it can work for a young, inexperienced driver like Brent Robinson and put him in the ballpark instead of out if it. It can also save a lot of expensive repairs (and angry fellow racers) by keeping some stability in the car of a racer who is learning the ropes. Traction control works because it is mechanical and reacts to input the same way each and every time.

I think Ray Cook, who monitored the results at Atomic had the most telling comment of all when he said: "This unit can read what the car is doing and react accordingly in ten to twelve pulses per second. I can't imagine my foot being able to work that quickly."

GODDARD
Performance Parts
 Manufacturer of
 Race Cars and Dirt Late Model components

**New Year... New Season...
 NEW WARRIOR CHASSIS!**



*New 2005 Warrior
 4 Bar Chassis*



Warrior SA5
 New design 2005 Warrior Swing Arm Chassis
 Call for additional information on these exciting new chassis

2010 John Sevier Hwy. • Knoxville, TN 37920
 Phone: (865) 573-2411 • Fax: (865) 573-8718
 WWW.GODDARDWARRIOR.NET

**FIVE STAR
 RACE CAR BODIES**
 www.starbodies.com 282.877.2171

WHITE • BLACK • RED • ORANGE • PEPSI BLUE • CHEVRON BLUE • YELLOW

DIRT-STYLE FENDERS
 WHITE CARD • 50 WHITE CARD • BROAD PAIL • CAMARO • MUSTANG • WARRIOR • JETTER

DIRT-STYLE NOSES 7 STYLES 7 COLORS
 "NOSE ONLY" GRAPHICS

Subscribe to Dirt Late Model
www.mompub.com
800.536.5277

NEW!



AP Racing PRF Racing Brake Fluid

608° – highest temperature professional brake fluid from the most trusted name in Racing Brake Fluid.

- New advanced moisture resistant properties
- Low viscosity level
- Lowest compressibility of any fluid available

AP RACING

Available from **Essex Parts Services Inc.**
 Exclusive AP Racing importer for stock car products in the USA.

essex parts services inc.
 125 Hampton Court
 Cramerton, NC 28032-1445
 Phone 704-824-6030 • Fax 704-478-1030
 www.essexparts.com • sales@essexparts.com

"When the track changes ten laps into the race, they won't let you call time-out and adjust your traction control," he said. "And they are not easy to adjust."

Problem number two is that it's very difficult to hide all the components of a wheel sensor system. Even the most unenlightened of tech inspectors could probably find them if they knew where to look. "Finally, it dawned on us that tire speed showed up in RPM," Davis said. "For example, a little bit of slip becomes a big spike in RPM because of the gear ratio. So, our idea was to base the device on rate of acceleration of the engine. It quickly became apparent that this was an ideal system for racing. Wheel sensor systems work fine on street cars, in the rain and such, but they are not fast on the corners. Our system is more of an aid that filters out mistakes. If you need to, you can throttle up and drive through it and make the car turn unlike a system that's maybe applying the rear brakes or dropping cylinders."

"The advantage of to an ignition

system is that it's instant loss of power. You're not waiting for a brake system to build pressure or actuate the solenoid. It's too late by the time all that happens in a racing scenario."

There are fears that ignition-based Traction Control will hurt the engine. Davis debunks that theory. "Most engine damage from ignition timing is too much advance. Retard will cause it to build cylinder heat, which leads to exhaust port heat and maybe water temperature that could burn the exhaust valves. But it takes a retard cycle of several seconds at a time to see any of that. Ours does it on a cylinder-by-cylinder basis, only pulling out the timing for 1/100ths of a second."

Davis Technologies is not a one-man band operation, but it's not Bosch or MSD or Mallory either. He clearly likes the idea of flying under the radar with as small a staff as he can get away with. "I do the engineering, the software, and most of the actual design of the circuits. Some of the new stuff we are working on, I've farmed out to places that can be a little more efficient. We've got a couple of people in the field and some sub-contractors and

that's about it."

The first model built is still in the line. It was fitted right into the ignition box and activated by a pin code. You punched the code in and the device woke up. They offered an alternative unit that was activated by a wire. That one was a little easier to find, though Davis claims no one ever did find one.

When tech inspectors began really looking at ignition boxes, they built the TM-3000. That one was built into an ignition box that supposedly could not be modified and was sealed. Basically, you couldn't take it apart. That got around that little problem of nosy tech inspectors for a while.

Eventually there was a demand for a smaller, removable unit that wasn't in the ignition box. That is the 5000.

"The feedback we got was that the box worked really well for the first twenty to thirty laps, then it seemed to not do enough after that," said Davis. "Some customers started buying two boxes to do the job. The thought then was that we needed to make one box and be able to toggle between two thresholds. During one late night ses-

sion, we came up with the idea of a self-learning unit. This would actually monitor the rate of acceleration of the engine, compare it to other factors, go through some math and determine what the threshold needs to be. That threshold is updated every tenth of a second.

"That one customization revolutionized traction control. Because now if you've got one corner that's different than the other, a driver switches groove, maybe the track takes on rubber or gets dry/slick, or in asphalt racing the tires are burned up, or you've used up a lot of fuel and changed the weight distribution, it doesn't matter. Our unit comes with four different modes. A driver finds the one that works for him with his engine package, and it's all automatic from there."

The days and nights of struggling to build a business are long gone. Instead, he works on outfoxing those who would attempt to catch him. And he comes up with an idea to bring Traction Control to the masses.

"We've got a new unit and have agreements with four major retailers to market the product," he said. "It will sell for \$1,895 and not be self-learning or upgradeable. For guys running twenty to thirty lap features or running a track that doesn't change much, however, this unit will work for them. It's a little bigger, about the size of a pack of cigarettes, but you'll still be able to hide it."

Hide and seek. Show and tell. Ah, the games people play in racing. All in the effort to gain, as they say in the sport, my fair advantage.

"One of my units was found on a racetrack [Bristol] in a major series," Davis says in confidential tones. "They assume a fan didn't throw it out there since it's a \$6,500 part. [That would be the alleged Kurt Busch toss out the window.] Another time at a big Late Model asphalt race, they said a guy was seen putting one in his pocket. They got to arguing in the pits, and he got disqualified. But they never proved

he had traction control. He wouldn't empty his pockets. And then there was a story about the Dirt Late Model driver that they found a plug in his car while he was leading the points in the big series. Inspectors may have found things they didn't like, or suspected things, but no one has ever caught a driver with one of our units."

What it all boils down to is not being better than the tech guys Davis has simply got more time to spend than they do. It's his full-time job to keep on top of what's changing and what the

tech people are doing. About a year or so ago, current World of Outlaws tech inspector Walter Burson told me about what he said to Billy Moyer after the Arkansas driver had finished second in a race and suspected the winner had used Traction Control.

"If you want to stay here until four in the morning, we'll start tearing stuff apart and pay you in two to three weeks when everything comes back as not having been modified. We'll take out the dash, motor, brakes, the gauges, the pumper helmets, ignition

Dirt Style Plastic Fenders & Noses

'Nose Only' Graphic Kit

120W

GRAPHIC 36

QUALITY FIVE STAR PRODUCTS



Fenders

7 COLORS

LOW WEIGHT - DURABLE

SLEEK AERODYNAMIC STYLE

Fenders

7 COLORS

GRAPHIC 36

QUALITY FIVE STAR PRODUCTS



Noses

8 STYLES / 7 COLORS

QUALITY FIVE STAR PRODUCTS

Noses

8 STYLES / 7 COLORS

FIVE STAR RACING BODIES

Quality & Service

262.877.2171

Quality Five Star Products You Can Depend On... Shipped The Same Day

NEW PRODUCTS!

WHEEL SPACERS



One Inch Wide 5 Wheel Spacer (MM144)

Price: \$99.00

This spacer will fit any wide 5 set up with shortened hub studs. Designed to fit 15 hole wide 5 wheels. Spacer is 1" thick billet aluminum. Studs included.



One Inch Wheel Spacer (MM143)

Price: \$25.00

This slick new wheel spacer fits 5x5" and 5x4 3/4" bolt patterns. It is made of strong yet lightweight one inch thick aluminum and machined with precision.

W. WEHRS MACHINE & RACING PRODUCTS

find your nearest dealer at www.wehrs-machine.com

wehsmach@aol.com phone 606.466.4343 toll free 877.460.7211

Subscribe to
Dirt Late Model
www.mompub.com
800.536.5277

4030 Concord Pkwy S
Concord, NC 28027

BSR PRODUCTS

149 Rolling Hill Road
 Mooresville, NC 28117

704-795-0901
800-432-2798

www.bsrproducts.com
www.bsrsafety.com

704-662-0901
800-572-6837



Hutchens



D-Cel

THE Safety Solutions Head & Neck Restraint
(formerly the Hutchens Device)

★ 2 Styles Available ★

Call 800-432-2798 to order

Call for our NEW 2005 CATALOG!


system, pull everything off the car. We'll have to send it all back to the manufacturers, because you can't expect us to be electronics experts."

It's a huge effort for something that will be awfully hard to catch. None of the series have the resources and manpower to inspect thoroughly for Traction Control. And then, as soon as they figure out what's going on, Davis will change things. So now what do they look for?

Gary Nelson of NASCAR stopped by Davis' booth to chat at the recent

PRI show. Davis was not intimidated. It happened to be standing there at the time. It was plain that Davis was not fazed. Nelson admitted that NASCAR has tested their product and tried to devise ways to detect it."

"NASCAR is dead against it," he said. "They want to scare the 43 cars that run on Sunday by threatening life-time bans, yadda-yadda. But I can say that some of those guys are running Traction Control and even NASCAR isn't catching them. The solution causes more problems than it's worth."

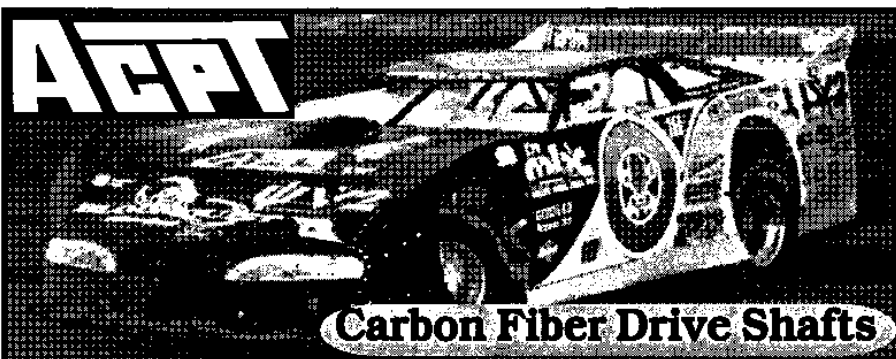

Carbon Fiber Drive Shafts

Faster * Lighter * Smoother
*** Safer Shafts For Cars ***
Boats * Trucks & Machines
*** The Ultimate Driveshaft**

ACAT
Carbon Fiber Drive Shafts
15602 Chemical Lane
Huntington Beach, CA
(714) 895-5544

Davis already has one unit (TM-9000) that is described as the size of a Bic cigarette lighter. It performs exactly the same as the 5000. It's just easier to palm or hide and costs about \$1,000 more. But don't make the mistake of thinking that's the end as far as development goes.

"There is new technology that allows us to remove the components that the unit needs to interface with the device," said Davis. "You start getting rid of the biggest things on these units: the housing, plug-in, buttons, switches, etc., this whole thing could easily be put inside a quarter-inch cube. Try to find that. You make your settings on a wireless controller and upload it to an actuator hidden on the car somewhere. You can't realistically expect a tech guy to be proficient enough in digital tachs or gauges to know which chip goes where. And the next step is that ignition systems are becoming digital, which means there's a microprocessor on board controlling the ignition system. The microprocessor in the tach is only operating at about one percent of capacity. So we can easily change it with another one that looks exactly alike. Now it does all the tach functions and performs Traction Control. And there are many other places within an engine where similar substations could occur."

You would think that an outfit as large as NASCAR, with all the resources at their disposal could effectively police just about anything. But they can't. Otherwise, why was a unit found on the track at Bristol? Why are several Cup teams on Davis' customer list? I haven't seen his customer list, so I can't corroborate his story. But I've talked to other people that will affirm his assertions, off the record, of course.

You'd also think someone would have come up with a product that would detect the use of Traction Control, much like radar detectors signal the use of radar guns. Mooney Starr tried one at his big Modified race last year in Batesville, Arkansas. Talk about causing more problems than they are worth.

"I have two units in my shop like the one that was used at the Batesville race," said Davis. "We can't make either one of them detect our system. Nobody was caught with one of my units at that race, and supposedly there were a lot of motors that mysteriously

failed. I can easily see why this detection unit could cause the timing to be inadvertently retarded for a long time and cause headers to turn red and motors to overheat. I mean, eight cars fell out of the race with motor problems, which is an unusually high number for motors that ran fine an hour ago. What's the conclusion?"

MSD is working on a system that supposedly will catch the ignition signal being changed, but it is not yet available. One version would limit the motor to 4,000 RPM should a signal be detected.

"Frankly, I wouldn't want a car almost shutting down right in front of me," said Davis. "There's gonna be one big wreck behind the guy that was cheating. I don't know how they're going to deal with that. And what if it sends a false trigger? Of course, as soon as MSD releases this unit we'll build a product to get around it."

The hot button issue is the ethics. Does Traction Control take us one step closer to having robot drivers who just ride around as the car does all the work for them? It's not an easy question to answer. The cost issue makes no sense, however. What's \$6,500 for a part that keeps on working year after year? Shouldn't we be more worried about \$3,500 exhaust headers and \$10,000 suspension packages?

"Fifteen years ago you couldn't have power steering in a Sprint Car," said Davis. "Now they've all got it. Titanium and carbon fiber parts were once illegal. Now you've got to have it all no matter the cost. Why should a \$6,500 part cause such concern? I don't know of many people that go racing to save money. The other thing is, we've got units out there that are seven years old and still doing the job they were built to do."

That's the other question about Traction Control. Does it really work? We tried our best to address that issue in the on-track testing we did. Not surprisingly, Davis has his own answer.

"You remember the guy with the fiberglass brake rotors? No? Well, that's because they didn't work. The reason there's such a stink about Traction Control is because it does work. We've sold an incredible amount of these units. People aren't buying them to hang on their Christmas tree."

Proven in the Air . . .

- Aircraft Quality Self Aligning SPHERICAL and ROE END BEARINGS
- Teflon Lined and Metal-to-Metal
- Alloy and Stainless Steels
- Specials for Specific Engineering Needs

RELY ON RADIAL

RADIAL BEARING CORPORATION

Proven on the Track . . . 21 Taylor Street, Danbury, CT 06810

For Free Catalog Call 1-800-377-1937

SAVE TIME & MONEY!
BUILD YOUR OWN BODIES

Adjustable Counterweights
 Bronze Bushings on Hinges
 1/2" plate construction
 Fully Adjustable Tension Bars
 1-inch Radius Bar included on All Brakes
 Heavy Duty Cam-Lock Design

Call for more details!

BOYD-BUILT fabricators
 CHATTANOOGA, TN • 423-698-1270

6-ft. 18 Gauge \$1,495
 8-ft. 18 Gauge \$1,995

FINANCING AVAILABLE

www.boyd-built.com
(423) 698-1270

Irvan-Smith, Inc. Metal Fabrication and Racing Equipment

ENGLISH WHEEL \$666.00	RACE JACKS BY RUNNHOEZL Dirt Shafts Available \$660.00	SHRINKER STRETCHER \$285.00 pr.	TUBING NOTCHER \$315.00
TRIGGER LATCHES \$10.00 ea.	HD SPINDLE KIT For 1/2" and 3/4" shafts \$325.00	AIR RIVETER \$59.00	LONGACRE SCALES From \$398.00
TUBING BENDER 1/4" to 2" Dia. Set of Mandrels \$1295.00	FIT WAGONS Starting at \$1150.00	RV CAB Build your own Kith \$21.00 \$495.00	CLECO KITS \$25.00 (18" x 40" Cleco Kit 1 Foot 24" x 36" Cleco Kit 1 Foot)

BRAKES Starting at \$370.00

BEAD ROLLERS Electric \$590.00 Manual \$395.00

Call For FREE Catalog

www.IrvanSmith.com

BRAKE MAN **INNOVATIVE BRAKE TECHNOLOGY™**

Sorry to be the one to "brake" it to you but most of the brake calipers you see on the market today are 3rd or 4th generation copies of what we invented years ago!

Do you think it's about time you found out about the true innovations in brake technology? Find out why more and more racers are switching to The Brake Man.

www.thebrakeman.com 1 (805) 987-STOP